# AMETRIX™

## Roundel

**SMALL LINEAR**

- Extruded aluminum housing
- Die-cast aluminum end caps
- Integrated visor option - solid, perf or opal windows
- Die-formed 94% reflective anodized aluminum reflector
- Gasketed hinging doorframe - indoor toolless entry

### Integral

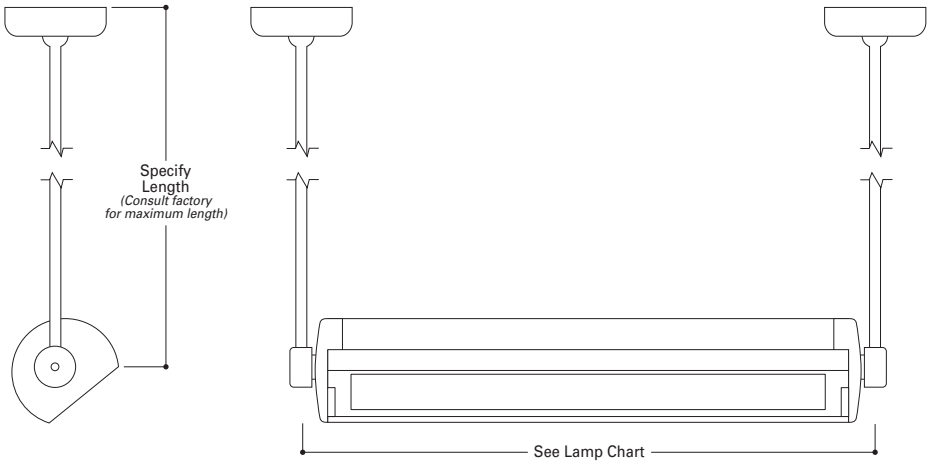


LAMP CHART - Integral

| SOURCE | WATTAGE | LENGTH |
|---|---|---|
| T8 | 17 | 28-3/4" |
| | 25 | 40-3/4" |
| | 32 | 52-3/4" |
| T5/T5HO | 14/24 | 28-3/4" |
| | 21/39 | 40-3/4" |
| | 28/54 | 52-3/4" |

### ORDERING INFORMATION

**SAMPLE NUMBER: RN-SI-N-1-F021-120-W-PP30**

**Product**
- ❑ **RN** Roundel No Visor
- ❑ **RS** Roundel Solid Visor
- ❑ **RO** Roundel Opal Visor
- ❑ **RP** Roundel Square Perf Visor

**Size - Indoor**
- ❑ **SI** Small Indoor

**Lens**
- ❑ **C** Clear
- ❑ **P** Micro-prismatic
- ❑ **N** None

**No. of Lamps**
- ❑ **1** 1 Lamp

**Lamp/Ballast Type**
- ❑ **F** Fluorescent (Electronic)
- ❑ **B** Fluorescent* (Battery Pack)

**Wattage**
- ❑ **014** 14W (2' T5)
- ❑ **017** 17W (2' T8)
- ❑ **021** 21W (3' T5)
- ❑ **024** 24W (2' T5HO)
- ❑ **025** 25W (3' T8)
- ❑ **028** 28W (4' T5)
- ❑ **032** 32W (4' T8)
- ❑ **039** 39W (3' T5HO)
- ❑ **054** 54W (4' T5HO)

**Voltage**
- ❑ **120** 120V
- ❑ **277** 277V
- ❑ **347** 347V
- ❑ **UNV** Universal*

**Finish**
- ❑ **W** White
- ❑ **S** Silver
- ❑ **B** Bronze
- ❑ **C** Custom (Consult factory)

**Mounting**
- ❑ **PP12** Pendant 12"
- ❑ **PP18** Pendant 18"
- ❑ **PP24** Pendant 24"
- ❑ **PP30** Pendant 30"
- ❑ **PS12** Pendant Swivel 12"
- ❑ **PS18** Pendant Swivel 18"
- ❑ **PS24** Pendant Swivel 24"
- ❑ **PS30** Pendant Swivel 30"

**Modification**
- ❑ **MOD** Provide description of the modification. (Consult factory)

**Accessories**
- ❑ **L45** 45° Cross Blade Louver
- ❑ **L25** 25° Cross Blade Louver

*Specifications and dimensions subject to change without notice.*

* *Not available with all sources or options. (Consult factory)*